

New Hampshire Volunteer River Assessment Program

2004

OYSTER RIVER

WATER QUALITY REPORT



FEBRUARY 2005

STATE OF NEW HAMPSHIRE
Volunteer River Assessment Program
2004
OYSTER RIVER
Water Quality Report

STATE OF NEW HAMPSHIRE
DEPARTMENT OF ENVIRONMENTAL SERVICES
P.O. BOX 95
29 HAZEN DRIVE
CONCORD, N.H. 03302-0095

MICHAEL P. NOLIN
COMMISSIONER

HARRY T. STEWART
DIRECTOR
WATER DIVISION

Prepared by:
Ted Walsh, VRAP Coordinator
Aric Tillberg, VRAP Intern

February 2005

Printed on Recycled Paper



1. INTRODUCTION	3
1.1. Purpose of Report.....	3
1.2. Report Format	3
2. VOLUNTEER RIVER ASSESSMENT PROGRAM OVERVIEW	5
2.1. Past, Present, and Future	5
2.2. Technical Support.....	5
2.3. Training and Guidance	6
2.4. Data Usage	6
2.5. Quality Assurance/Quality Control.....	7
3. WATER QUALITY PARAMETERS TYPICALLY MEASURED BY VRAP VOLUNTEERS	9
3.1. Temperature	9
3.2. Dissolved Oxygen	9
3.3. pH.....	10
3.4. Specific Conductance	10
3.5. Turbidity.....	10
3.6. Bacteria	11
3.7. Total Phosphorus	11
3.8. Metals.....	11
4. MONITORING PROGRAM DESCRIPTION	13
5. RESULTS AND DISCUSSION	15
5.1. Dissolved Oxygen	15
5.2. pH.....	18
5.3. Turbidity.....	21
5.4. Specific Conductance	24
5.5. Bacteria/ <i>Escherichia coli</i>	27
5.6. Methyl Tertiary Butyl Ether (MtBE)	31

APPENDIX: 2004 Oyster River Water Quality Data

Cover Photograph: Oyster River at 09-OYS, Route 155A Bridge, Lee

ACKNOWLEDGEMENTS

The New Hampshire Department of Environmental Services (NHDES) -Volunteer River Assessment Program (VRAP) extends sincere thanks to the Oyster River VRAP volunteers and the Oyster River Watershed Association for their efforts during 2004. This report was created solely from the data collected by the volunteers listed below*. Their time and dedication is an expression of their genuine concern for local water resources and has significantly contributed to our knowledge of river and stream water quality in New Hampshire.

2004 Oyster River Volunteers

Brian Gallagher
Jim Hornbeck
Dan Hornbeck
Tom Lee
Gloria Quigley
Harold Hocker
Barbara Maurer
Toni Hartgerink
Julia Belshaw
Sarah MacDougall
Ben Getchell
Larry Zeis
Greg DeCeoles
Haruke Aschina
Bob Smith
Tony Federer
Fil Glanz

*Station 05-OYS (Route 108 Bridge) was not monitored by the ORWA during 2004. This station is a trend station in the NHDES Ambient River Monitoring Program and was monitored on numerous occasions during 2004. Given that the ORWA has monitored this station in the past we have included the data collected via the Ambient River Monitoring Program in this report.

1. INTRODUCTION

1.1. Purpose of Report

Each year NHDES prepares and distributes a water quality report for each volunteer group that is based solely on the water quality data collected by that volunteer group during a specific year. The reports summarize and interpret the data, particularly as they relate to New Hampshire surface water quality standards, and serve as a teaching tool and guidance document for future monitoring activities by the individual volunteer groups. The purpose of this report is to present the data collected by the Oyster River Watershed Association volunteers in 2004.

1.2. Report Format

Each report includes the following:

- ✓ **Volunteers River Assessment Program (VRAP) Overview:** This section includes a discussion of the history of VRAP, the technical support, training and guidance provided by NHDES, and how data is transmitted to the volunteers and used in surface water quality assessments.
- ✓ **Water Quality Parameters Typically Selected for Monitoring:** This section includes a brief discussion of water quality parameters typically sampled by volunteers and their importance, as well as applicable state water quality criteria or levels of concern.
- ✓ **Monitoring Program Description:** A description of the volunteer group's monitoring program is provided in this section including monitoring objectives as well as a table and map showing sample station locations.
- ✓ **Results and Discussion:** Water quality data collected during the year are summarized on a parameter-by-parameter basis using (1) a summary table that includes the number of samples collected, data ranges, the number of samples meeting New Hampshire water quality standards, and the number of samples adequate for water quality assessments at each station, (2) a discussion of the data, (3) a list of applicable recommendations, and (4) a river graph showing the range of measured values at each station. Sample results reported as less than the detection limit were assumed equal to one-half the detection limit on the river graphs. This approach simplifies the understanding of the parameter of interest, and specifically helps one to visualize how the river or watershed is functioning from upstream to downstream. In addition, this format allows the reader to better understand potential pollution areas and target those areas for

additional sampling or environmental enhancements. Where applicable, the river graph also shows New Hampshire surface water quality standards or levels of concern for comparison purposes.

- ✓ **Appendix – Data:** The appendix includes a spreadsheet showing the data results and additional information, such data results which do not meet New Hampshire surface water quality standards, and data that is unusable for assessment purposes due to quality control requirements.

2. VOLUNTEER RIVER ASSESSMENT PROGRAM OVERVIEW

2.1. Past, Present, and Future

In 1998, the New Hampshire Department of Environmental Services (DES) initiated the New Hampshire Volunteer River Assessment Program (VRAP) as a means of expanding public education of water resources in New Hampshire. VRAP promotes education and awareness of the importance of maintaining water quality in rivers and streams. VRAP was created in the wake of the success of the existing New Hampshire Volunteer Lake Assessment Program (VLAP), which provides educational and stewardship opportunities pertaining to lakes and ponds to New Hampshire's residents.

Today, VRAP continues to serve the public by providing water quality monitoring equipment, technical support, and educational programs. VRAP supports over a dozen volunteer groups on numerous rivers and watersheds throughout the state. These volunteer groups conduct water quality monitoring on an ongoing basis. The work of the VRAP volunteers increases the amount of river water quality information available to local, state and federal governments, which allows for effective financial resource allocation and watershed planning.

The intent of VRAP is to educate people of all ages and backgrounds about river and stream water quality, the threats to water quality posed by increasing population, development and industrialization, and the ways in which we can all work together to minimize these impacts.

2.2. Technical Support

VRAP lends and maintains water quality monitoring kits to volunteer groups throughout the state. The kits contain electronic meters and supplies for "in-the-field" measurements of water temperature, dissolved oxygen, pH, specific conductance (conductivity), and turbidity. These are the core parameters typically measured by volunteers. However, other water quality parameters such as nutrients, metals, and *E. coli* can also be studied by volunteer groups, although VRAP does not always provide funds to cover laboratory analysis costs. Thus, VRAP encourages volunteer groups to pursue other fundraising activities such as association membership fees, special events, in-kind services (non-monetary contributions from individuals and organizations), and grant writing.

VRAP typically recommends sampling every other week during the summer, and citizen-monitoring groups are encouraged to organize a long-term sampling program in order to begin to determine trends in river conditions. Each year volunteers arrange a sampling schedule and design in cooperation with the VRAP Coordinator. Project designs are created through a review and discussion of existing water quality information, such as known and perceived problem areas or locations of exceptional water quality. The interests, priorities, and

resources of the partnership determine monitoring locations, parameters, and frequency.

Water quality measurements repeated over time create a picture of the fluctuating conditions in rivers and streams and help to determine where improvements, restoration or preservation may benefit the river and the communities it supports. Water quality results are also used to determine if a river is meeting surface water quality standards. Volunteer monitoring results, meeting DES Quality Assurance and Quality Control (QA/QC) requirements, supplement the efforts of DES to assess the condition of New Hampshire surface waters. The New Hampshire Surface Water Quality Regulations are available through the DES Public Information Center at www.des.state.nh.us/wmb/Env-Ws1700.pdf or (603) 271-1975.

2.3. Training and Guidance

Each VRAP volunteer must attend an annual training session to receive a demonstration of monitoring protocols and sampling techniques. Training sessions are an opportunity for volunteers to come together and receive an updated version of monitoring techniques. During the training, volunteers have a chance to practice using the VRAP equipment and may also receive instruction in the collection of samples for laboratory analysis. Training is accomplished in approximately three hours, after which volunteers are certified in the care, calibration, and use of the VRAP equipment.

VRAP groups conduct sampling according to a prearranged monitoring schedule and VRAP protocols. VRAP aims to visit volunteers during scheduled sampling events to verify that volunteers successfully follow the VRAP protocols. If necessary, volunteers are re-trained during the visit, and the group's monitoring coordinator is notified of the result of the verification visit. Volunteer organizations forward water quality results to the VRAP Coordinator for incorporation into an annual report and state water quality assessment activities.

2.4. Data Usage

2.4.1. Public Outreach/Water Quality Reports

All data collected by volunteers are summarized in water quality reports that are prepared and distributed after the conclusion of the sampling period (typically fall or winter). Each volunteer group receives copies of the report. The volunteers can use the reports and data as a means of understanding the details of water quality, guiding future sampling efforts, or determining restoration activities.

2.4.2. State Surface Water Quality Assessments

Along with data collected from other water quality programs, specifically the State Ambient River Monitoring Program, applicable volunteer data are used to support periodic DES surface water quality assessments. VRAP data are entered into NHDES's Environmental Monitoring Database and are ultimately uploaded to the Environmental Protection Agency's database, STORET. Assessment results and the methodology used to assess surface waters are published by DES every two years (i.e., Section 305(b) Water Quality Reports) as required by the federal Clean Water Act. The reader is encouraged to log on to the DES web page to review the assessment methodology and list of impaired waters <http://www.des.state.nh.us/wmb/swqa/>.

2.5. Quality Assurance/Quality Control

In order for VRAP data to be used in the assessment of New Hampshire's surface waters, the data must meet quality control guidelines as outlined in the VRAP Quality Assurance Project Plan (QAPP). The VRAP QAPP was approved by NHDES and reviewed by EPA in the summer of 2003. The QAPP is reviewed annually and is officially updated and approved every five years. The VRAP Quality Assurance/Quality Control (QA/QC) measures include a six-step approach to ensuring the accuracy of the equipment and consistency in sampling efforts.

- **Calibration:** All meters are calibrated before the first measurement and after the last one. Prior to each measurement, the pH and dissolved oxygen meters are calibrated.
- **Replicate Analysis:** A second measurement by each meter is taken from the original sample at one of the stations during the sampling day. The replicate analysis should not be conducted at the same station over and over again, but should be conducted at different stations throughout the monitoring season.
- **6.0 pH Standard:** A reading of the pH 6.0 buffer is recorded at one of the stations during the sampling day. If the same sampling schedule is used throughout the monitoring season, the 6.0 pH standard check should be conducted at different stations.
- **Zero Oxygen Standard:** A reading of a zero oxygen solution is recorded at one of the stations during the sampling day. If the same sampling schedule is used throughout the monitoring season, the zero oxygen standard check should be conducted at different stations.
- **DI Turbidity Blank:** A reading of the DI blank is recorded at one of the stations during the sampling day. If the same sampling schedule is used throughout the monitoring season, the blank check should be conducted at different stations.
- **Post-Calibration:** At the conclusion of each sampling day, all meters are calibrated.

2.5.1. Measurement Performance Criteria

Precision is calculated for field and laboratory measurements through measurement replicates (instrumental variability) and is calculated for each sampling day. The use of VRAP data for assessment purposes is contingent on compliance with a parameter-specific relative percent difference (RPD) as derived from equation 1, below. Any data exceeding the limits of the individual measures are disqualified from surface water quality assessments. All data that exceeds the limits defined by the VRAP QAPP are acknowledged in the data tables with an explanation of why the data was unusable. Table 2-1 shows typical parameters studied under VRAP and the associated quality control procedures.

(Equation 1)

$$RPD = \frac{|x_1 - x_2|}{\frac{x_1 + x_2}{2}} \times 100 \%$$

where x_1 is the original sample and x_2 is the replicate sample

Table 2- 1. Field Analytical Quality Controls

Water Quality Parameter	QC Check	QC Acceptance Limit	Corrective Action	Person Responsible for Corrective Action	Data Quality Indicator
Temperature	Measurement replicate	± 0.2 °C	Repeat measurement	Volunteer Monitors or Program Manager	Precision
Dissolved Oxygen	Measurement replicate	$\pm 2\%$ of saturation, or ± 0.2 mg/L	Recalibrate instrument, repeat measurement	Volunteer Monitors or Program Manager	Precision
	Known buffer (zero oxygen solution)	<0.5 mg/L	Recalibrate instrument, repeat measurement	Volunteer Monitors or Program Manager	Relative accuracy
pH	Measurement replicate	± 0.1 std units	Recalibrate instrument, repeat measurement	Volunteer Monitors or Program Manager	Precision
	Known buffer (pH = 6.0)	± 0.1 standard units	Recalibrate instrument repeat measurement	Volunteer Monitors or Program Manager	Accuracy
Specific Conductance	Measurement replicate	± 30 μ S/cm	Recalibrate instrument, repeat measurement	Volunteer Monitors or Program Manager	Precision
	Method blank	± 5.0 μ S/cm	Recalibrate instrument, repeat measurement	Volunteer Monitors or Program Manager	Accuracy
Turbidity	Measurement replicate	± 0.1 NTU	Recalibrate instrument, repeat measurement	Volunteer Monitors or Program Manager	Precision
	Method blank	± 0.1 NTU	Recalibrate instrument, repeat measurement	Volunteer Monitors or Program Manager	Accuracy

3. WATER QUALITY PARAMETERS TYPICALLY MEASURED BY VRAP VOLUNTEERS

3.1. Temperature

Water temperature is one of the most important and commonly observed water quality parameters. Temperature influences the rate of many physical, chemical and biological processes in the aquatic environment. Each aquatic species has a range of temperature and other factors that best support its reproduction and the survival of offspring. Temperature can also impact aquatic life because of its influence on parameters such as ammonia as well as the concentration of dissolved oxygen in the water.

Temperature in Class B waters shall be in accordance with RSA 485-A:8, II which states in part “any stream temperature increase associated with the discharge of treated sewage, waste or cooling water, water diversions, or releases shall not be such as to appreciably interfere with the uses assigned to this class.”

3.2. Dissolved Oxygen

Adequate oxygen dissolved in the water is crucial to the survival and successful reproduction of many aquatic species. Organisms such as fish use gills to transfer oxygen to their blood for vital processes that keep the fish active and healthy. Oxygen is dissolved into the water from the atmosphere, aided by wind and wave action where it tumbles over rocks and uneven stream beds. Aquatic plants and algae produce oxygen in the water, but this contribution is offset by respiration at night as well as by bacteria which utilize oxygen to decompose plants and other organic matter into smaller and smaller particles.

Oxygen concentrations in water are measured using a meter that produces readings for both milligrams per liter (mg/L) and percent (%) saturation of dissolved oxygen. For Class B waters, any single dissolved oxygen reading must be greater than 5 mg/L for the water to meet New Hampshire water quality standards. This means that in every liter of water there must be at least five milligrams of dissolved oxygen available for ecosystem processes.

More than one measurement of oxygen saturation taken in a twenty-four hour period can be averaged to compare to the standards. Class B waters must have a dissolved oxygen content of not less than 75% of saturation, based on a daily average. The concentration of dissolved oxygen is dependent on many factors including temperature and sunlight, and tends to fluctuate throughout the day. Saturation values are averaged because a reading taken in the morning may be low due to respiration, while a measurement that afternoon may show that the percent saturation has recovered to acceptable levels. Water can become saturated with more than 100% dissolved oxygen. It should be noted that other dissolved oxygen requirements in the New Hampshire Surface Water Quality

Regulations (Env-Ws 1700) pertain to cold water fish spawning areas, impoundments (dams), and reservoirs.

3.3. pH

pH is a measure of hydrogen ion activity in water. The lower the pH, the more acidic the solution due to higher concentrations of hydrogen ions. A high pH is indicative of an alkaline or basic environment. pH is measured on a logarithmic scale of 0 to 14. NH rivers typically fall within the range of pH values from 6 to 8. Most aquatic species need a pH of between 5 and 9. pH also affects the toxicity of other aquatic compounds such as ammonia and certain metals.

New Hampshire Surface Water Quality Regulations (Env-Ws 1700) state that pH shall be between 6.5 and 8, unless naturally occurring. Readings that fall outside this range may be due to natural conditions such as the influence of wetlands near the sample station or because of the soils and bedrock in the area. Tannic and humic acids released to the water by decaying plants, for example, can create more acidic waters in areas influenced by wetlands. Low pH can also be due to atmospheric deposition of chemicals emitted by sources such as fossil fuel power plants and car emissions. When it rains, the chemicals in the atmosphere can lower the pH of the rain (commonly referred to as "acid rain"), which can, in turn, lower the pH of the river or stream. Acid rain typically has a pH of 3.5 to 5.5.

3.4. Specific Conductance

Specific conductance (informally termed conductivity) is the numerical expression of the ability of water to carry an electric current, and is a measure of the free ion content in the water. Water contains ions (charged particles) which can come from natural sources such as bedrock, or be introduced by human activity. The free ions carry an electrical current. Conductivity can be used to indicate the presence of chloride, nitrate, sulfate, phosphate, sodium, magnesium, calcium, iron, and aluminum ions.

There is no numeric standard for conductivity because levels naturally vary a great deal according to the geology of an area. Conductivity readings are useful for screening an area to determine potential pollution sources.

3.5. Turbidity

Turbidity is an indicator of the amount of suspended material in the water, such as clay, silt, algae, suspended sediment, and decaying plant material. A high degree of turbidity can scatter the passage of light through the water, and inhibit light from reaching important areas. Clean waters are generally associated with low turbidity, but there is a high degree of natural variability involved. Rain events often contribute turbidity to surface waters by flushing sediment, organic matter and other materials from the surrounding landscape into surface waters. According to New Hampshire's Surface Water Quality

Regulations (Env-Ws 1700), Class B waters shall not exceed naturally occurring conditions by more than 10 Nephelometric Turbidity Units (NTU).

3.6. Bacteria

Organisms causing infections or disease (pathogens) are often excreted in the fecal material of humans and other warm-blooded animals. *Escherichia coli* (*E. coli*) bacteria is not considered pathogenic. *E. coli* is, however, almost universally found in the intestinal tracts of humans and warm blooded animals and is relatively easy and inexpensive to measure. For these reasons *E. coli* is used as an indicator of fecal pollution and the possible presence of pathogenic organisms.

In fresh water, *E. coli* concentrations help determine if the water is safe for recreational uses such as swimming. According to New Hampshire's surface water quality standards, Class B waters shall contain not more than either a geometric mean based on at least three samples obtained over a sixty-day period of 126 *E. coli* per one hundred milliliters (CTS/100mL), or greater than 406 *E. coli* CTS/100mL in any one sample.

3.7. Total Phosphorus

Phosphorus is a nutrient that is essential to plants and animals, however, in excess amounts it can cause rapid increases in the biological activity in water. This may disrupt the ecological integrity of streams and rivers.

Phosphate is the form of phosphorus that is readily available for use by aquatic plants. Phosphate is usually the limiting nutrient in freshwater streams, which means relatively small amounts of phosphate can have a large impact on the biological activity in the water. Excess phosphorus can trigger nuisance algal blooms and aquatic plant growth, which can decrease oxygen levels and the attractiveness of waters for recreational purposes.

Phosphorus can be an indicator of sewage, animal manure, fertilizer, erosion, and other types of contamination. There is no numeric surface water quality standard for phosphorus due to the high degree of natural variability and the difficulty of pinpointing the exact source. However 0.05 mg/L total phosphorus is typically used as a level of concern, which means DES pays particular attention to readings above this level.

3.8. Metals

Depending on the metal concentration, its form (dissolved or particulate) and the hardness of the water, trace metals can be toxic to aquatic life. Metals in dissolved form are generally more toxic than metals in the particulate form. The dissolved metal concentration is dependent on the pH of the water, as well as the presence of solids and organic matter that can bind with the metal to render it less toxic. Hardness is primarily a measure of the calcium and

magnesium ion concentrations in water, expressed as calcium carbonate. The hardness concentration affects the toxicity of certain metals. Numeric criteria for metals may be found in New Hampshire's Surface Water Quality Regulations (Env-Ws 1700).

4. MONITORING PROGRAM DESCRIPTION

In 2001 the Oyster River Watershed Association (ORWA) began an intensive source water volunteer monitoring program on the Oyster River. The Volunteer River Assessment Program has provided field training, equipment, and technical assistance. The ORWA has designed a sampling program to link the monitoring efforts with community planning initiatives to protect water supply resources. Water samples have been collected from sites on the mainstem and tributaries throughout the watershed, particularly those associated with UNH drinking water intakes.

During 2004, six sites along the mainstem of the Oyster River and seven along tributaries were monitored from just upstream of the Lee traffic circle to just upstream of the dam in Durham. Sampling stations descriptions are provided in Table 4-1 and locations are shown on the foldout map on the following page.

Table 4-1. Sampling stations for the Oyster River, NHDES VRAP, 2004

Station ID	Location	Town/City	Elevation*
14-OYS	Jennison Driveway	Lee	100
01-XBB	Wheelright Pond Outlet, Stepping Stone Road Bridge	Lee	100
13-OYS	Rt. 4 Bridge, East of Lee Traffic Circle	Lee	100
01-DBE	Dube Brook, Cherry Ln. Bridge	Madbury	100
09-OYS	Rt. 155A Bridge, USGS Gaging Station	Lee	100
08-OYS	Mast Rd. Bridge	Durham	100
01-CSB	Chelsey Brook, Packers Falls Rd. Bridge,	Lee	100
07-OYS	Footbridge, College Woods	Durham	100
01-HML	Hamel Brook, Rt. 108 Bridge	Durham	0
05-OYS	Rt. 108/Newmarket Rd. Bridge	Durham	0
00J-PRB	Reservoir Brook, Sauer Terrace	Durham	0
02-BRD	Beards Brook, Coe Drive Bridge	Durham	0
03-JNC	Johnson Creek, Freshet Road Bridge	Durham	0

*Elevations have been rounded off to 100-foot increments for purposes of calibrating the dissolved oxygen meter.

5. RESULTS AND DISCUSSION

5.1. Dissolved Oxygen

5.1.1. Results and Discussion

Between seven and nine measurements were taken in the field for dissolved oxygen concentration at 13 stations from Lee to Durham (Table 5-1). Of the 115 measurements taken, all met quality assurance/quality control (QA/QC) requirements and are usable for New Hampshire's 2006 surface water quality report to the Environmental Protection Agency.

The upper sections of the Oyster River watershed are considered Class A waters; up to the crest of the Durham Reservoir water supply dam. From this point downstream the river is classified as Class B. The Class A New Hampshire surface water quality standard for dissolved oxygen is a minimum concentration of 6.0 mg/L **and** minimum daily average saturation of 75%. The Class B New Hampshire surface water quality standard for dissolved oxygen includes a minimum concentration of 5.0 mg/L **and** a minimum daily average of 75 % of saturation. In other words, there are criteria for both concentration and saturation that must be met before the river can be assessed as meeting dissolved oxygen standards.

Table 5-1. Dissolved Oxygen Data Summary - Oyster River 2004, VRAP


Station ID	Class	Samples Collected	Data Range (mg/l)	Acceptable Samples Not Meeting NH Class A/B Standards	Number of Usable Samples for 2006 NH Surface Water Quality Assessment
14-OYS	A	9	8.29 - 13.35	0	9
01-XBB	A	9	4.51 - 10.65	3	9
13-OYS	A	9	3.05 - 12.02	5	9
01-DBE	A	9	6.71 - 12.84	0	9
09-OYS	A	9	7.28 - 12.94	0	9
08-OYS	A	9	7.53 - 13.10	0	9
01-CSB	A	9	5.60 - 10.99	1	9
07-OYS	A	9	7.42 - 12.77	0	9
01-HML	B	9	4.94 - 9.54	1	9
05-OYS	B	7	8.25 - 13.06	0	7
00J-PRB	B	9	7.86 - 12.51	0	9
02-BRD	B	9	4.97 - 12.90	1	9
03-JNC	B	9	8.10 - 13.41	0	9
Total Number of Useable Samples for 2006 NH Surface Water Quality Assessment					115

Dissolved oxygen levels were highly variable and five stations had measurements below water quality standards [Figure 5-1]. The average dissolved oxygen concentration ranged from 6.3 mg/L to 10.6 mg/L. The low dissolved concentrations suggest a possible problem at some stations, or may be the result of natural conditions (e.g., the presence of wetlands or stagnant water caused by a beaver dam). An accurate determination of whether the dissolved oxygen standard is met can only be done using multiple measurements of dissolved oxygen saturation collected during the same day. Levels of dissolved oxygen sustained above the standards are considered adequate for wildlife populations and other desirable water quality conditions.

5.1.2. Recommendations

- Continue sampling at all stations to develop a long-term data set to better understand trends as time goes on.
- If possible, take measurements between 5:00 a.m. and 10:00 a.m., which is when dissolved oxygen is usually the lowest, and between 2:00 p.m. and 7:00 p.m. when dissolved oxygen is usually the highest.
- Next year incorporate the use of submersible meters to automatically record dissolved oxygen saturation levels during a period of several days. This could be done by using a Hydrolab® DataSonde 4a multiprobe, which is an instrument that can collect data at specific time intervals (e.g., every 15 minutes). The instrument can be put in the stream and left alone for a period of several days. The use of these instruments is dependent upon availability, and requires coordination with DES.

**Figure 5-1. Dissolved Oxygen Statistics for the Oyster River
March 12 - November 12, 2004, NHDES VRAP**

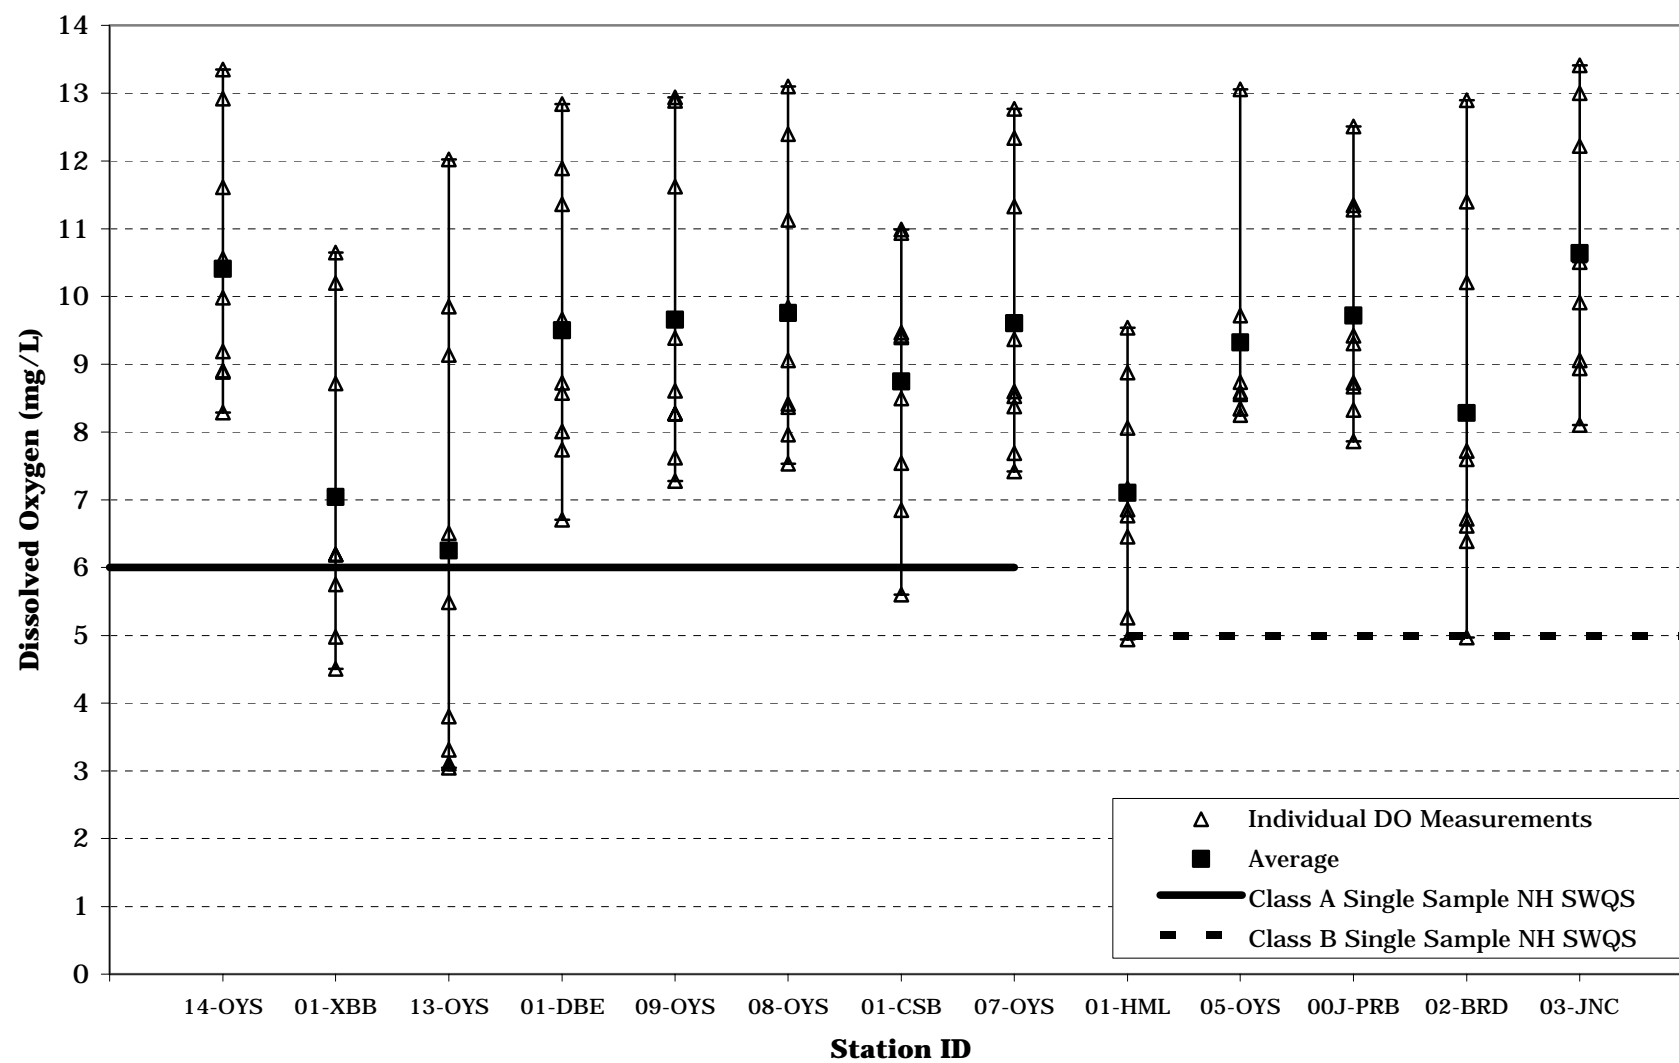

5.2. pH

5.2.1. Results and Discussion

Between six and nine measurements were taken in the field for pH at 13 stations from Lee to Durham (Table 5-2). Of the 108 measurements taken, all but one met quality assurance/quality control (QA/QC) requirements and are usable for New Hampshire's 2006 surface water quality report to the Environmental Protection Agency. New Hampshire Surface Water Quality Standards state that pH of Class A waters *shall be as naturally occurring*. The Class B New Hampshire surface water quality standard is 6.5 - 8.0, unless naturally occurring.

Table 5-2. pH Data Summary for the Oyster River 2004, VRAP

Station ID	Class	Samples Collected	Data Range (standard units)	Acceptable Samples Not Meeting NH Class A/B Standards	Number of Usable Samples for 2006 NH Surface Water Quality Assessment
14-OYS	A	9	5.66 - 6.51	0	9
01-XBB	A	8	6.32 - 7.00	0	8
13-OYS	A	8	5.87 - 6.49	0	8
01-DBE	A	8	6.59 - 7.27	0	8
09-OYS	A	8	6.47 - 7.13	0	8
08-OYS	A	9	6.12 - 7.26	0	9
01-CSB	A	8	5.31 - 7.00	0	8
07-OYS	A	8	5.03 - 7.27	0	7 ^a
01-HML	B	9	5.32 - 7.24	1	9
05-OYS	B	6	5.87 - 7.29	4	6
00J-PRB	B	9	5.62 - 7.38	1	9
02-BRD	B	9	5.30 - 7.20	1	9
03-JNC	B	9	5.87 - 7.62	2	9
Total Number of Useable Samples for 2006 NH Surface Water Quality Assessment					107

^a4/17/04; Volunteers indicated on data sheet that data point likely invalid

The median pH at the stations monitored ranged from 6.1 to 7.3 (Figure 5-2). Since the standard for Class A water is "as naturally occurring" it is important to collect long-term data at these stations to determine if the 2004 measurements are natural. In general these medians are consistent with data from previous years.

Some of the pH measurements for the Class B stations were below the range of the New Hampshire surface water quality standard. As with the Class A stations, these measurements are likely the result of natural conditions such as the soils, geology, or the presence of wetlands in the area. If the sampling


location is influenced by natural conditions, low pH measurements are not considered a violation of water quality standards.

In general, pH increased slightly downstream from Lee to Durham. The pattern of increasing pH may be the result of a greater number of cations (positively charge elements such as sodium and calcium), which typically increase in urbanized areas. This can be related to the increased specific conductance levels found in the lower reaches of the river (see Section 5.4).

5.2.2. Recommendations

- Continue sampling at all stations; this will help to build a long-term data set to better understand trends as time goes on.
- Consider sampling for pH in some of the tributaries and wetland areas that are influencing the pH of stations with measurements below state standards. Site conditions are considered along with pH measurements because of the narrative portion of the pH standard. RSA 485-A:8 states that pH of Class B waters *shall be between 6.5 and 8.0, except when due to natural causes*. Wetlands can lower the pH of a river naturally by releasing tannic and humic acids from decaying plant material. If the sampling location is influenced by wetlands or other natural conditions, then the low pH measurements are not considered a violation of water quality standards. It is important to note that the New Hampshire water quality standard for pH is fairly conservative, thus pH levels slightly below the standard are not necessarily harmful to aquatic life. In this case, additional information about factors influencing pH levels is needed.

**Figure 5-2. pH Statistics for the Oyster River
March 12 - November 12, 2004, NHDES VRAP**

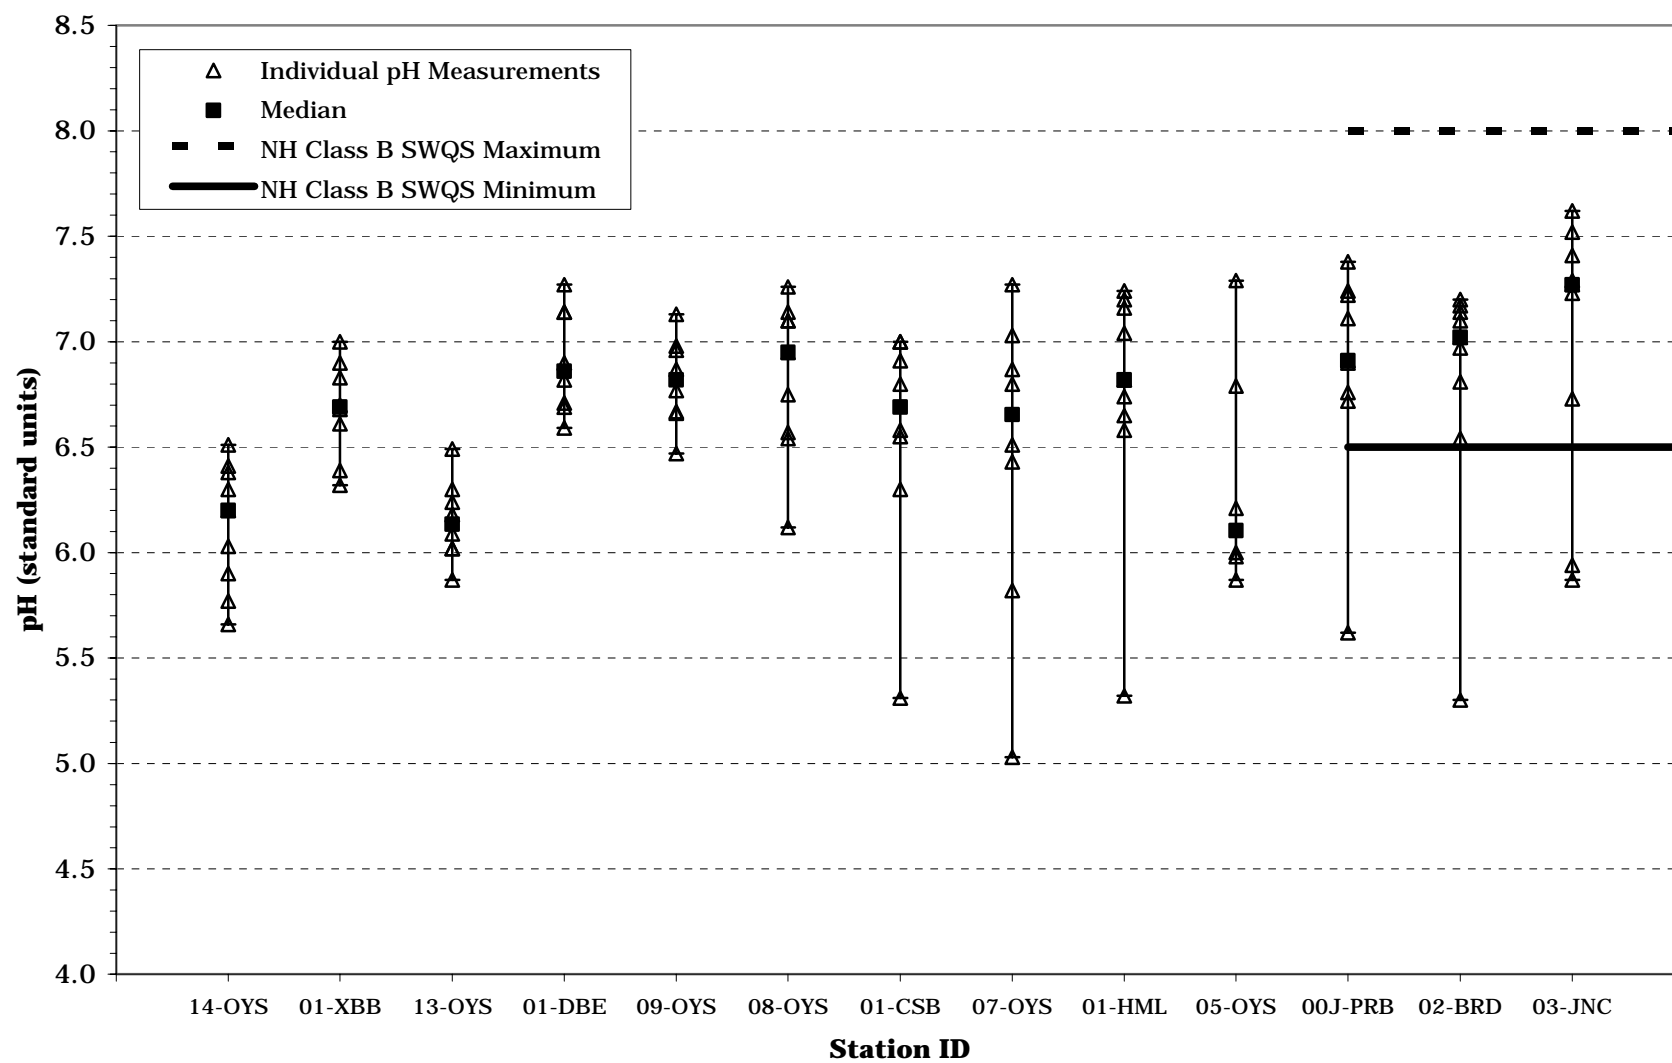

5.3. Turbidity

5.3.1. Results and Discussion

Between six and nine measurements were taken in the field for turbidity at 13 stations from Lee to Durham (Table 5-3). Of the 114 measurements taken, all met quality assurance/quality control (QA/QC) requirements and are usable for New Hampshire's 2006 surface water quality report to the Environmental Protection Agency. New Hampshire Surface Water Quality Standards state that turbidity of Class A waters *shall be as naturally occurring*. The Class B New Hampshire surface water quality standard for turbidity is less than 10 NTU above background.

Table 5-3 Turbidity Data Summary for the Oyster River 2004, VRAP

Station ID	Class	Samples Collected	Data Range (NTU)	Acceptable Samples Not Meeting NH Class A/B Standards	Number of Usable Samples for 2006 NH Surface Water Quality Assessment
14-OYS	A	9	0.65 - 1.80	0	9
01-XBB	A	9	1.30 - 3.20	0	9
13-OYS	A	9	0.90 - 2.70	0	9
01-DBE	A	9	2.80 - 9.60	0	9
09-OYS	A	9	3.90 - 14.0	0	9
08-OYS	A	9	3.50 - 32.0	1 ^a	9
01-CSB	A	9	1.60 - 3.70	0	9
07-OYS	A	9	4.0 - 15.0	0	9
01-HML	B	9	2.50 - 15.0	0	9
05-OYS	B	6	3.10 - 9.10	0	6
00J-PRB	B	9	3.20 - 13.0	0	9
02-BRD	B	9	4.10 - 45.0	1 ^a	9
03-JNC	B	9	4.90 - 24.0	1 ^a	9
Total Number of Useable Samples for 2006 NH Surface Water Quality Assessment					114


^aNumber of samples > 10 NTU over average of the season

Turbidity levels were highly variable with the average ranging from 1.3 NTU to 14.6 NTU (Figure 5-3). Although clean waters are associated with low turbidity there is a high degree of natural variability involved. Precipitation often contributes to increased turbidity by flushing sediment, organic matter and other materials from the surrounding landscape into surface waters. However, human activities such as removal of vegetation near surface waters and disruption of nearby soils can lead to dramatic increases in turbidity levels. In general it is typical to see a rise in turbidity in more developed areas due to increased runoff. Figure 5-3 shows a slight increase in turbidity averages as one moves downstream towards the more developed areas in Durham. Turbidity levels during 2004 will be a useful indicator of the typical background conditions of the river.

5.3.2. Recommendations

- Continue sampling at all stations as this will help to build a long-term data set to better understand trends as time goes on.
- Collect samples during wet weather; this will help us to understand how the river responds to runoff and sedimentation.
- If a higher than normal turbidity measurement occurs, volunteers can investigate further by moving upstream and taking additional measurements. This will facilitate isolating the location of the cause of the elevated turbidity levels. In addition, take good field notes and photographs. If human activity is suspected or verified as the source of elevated turbidity levels volunteers should contact the VRAP coordinator so NHDES can further investigate.

**Figure 5-3. Turbidity Statistics for the Oyster River
March 12 - November 12, 2004, NHDES VRAP**

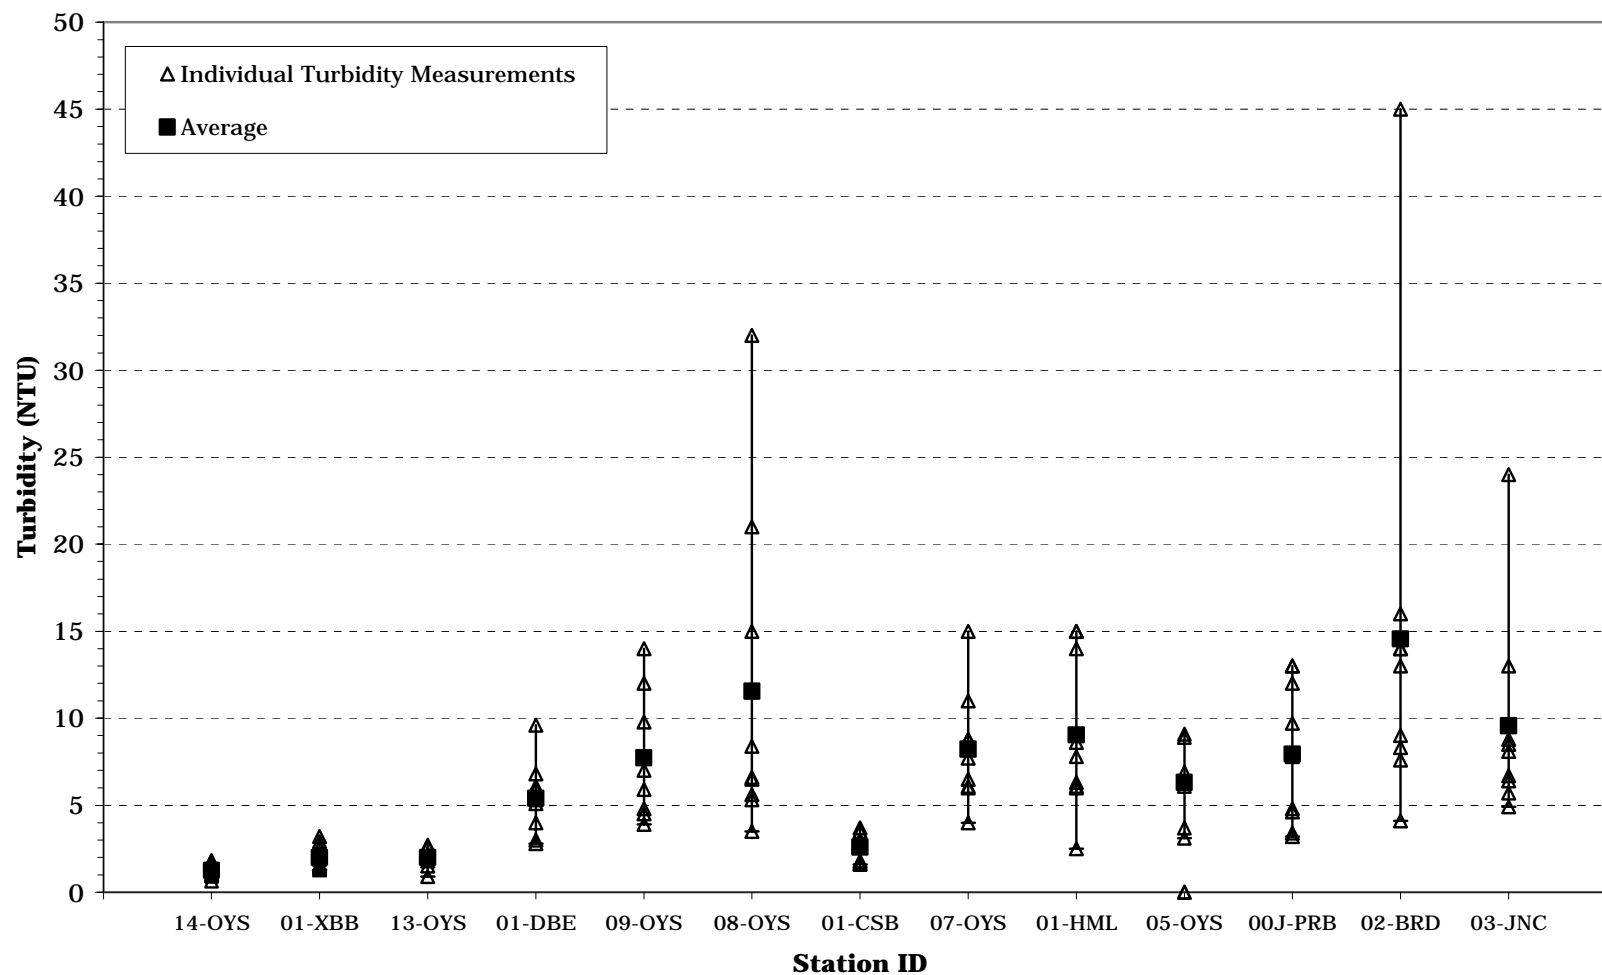

5.4. Specific Conductance

5.4.1. Results and Discussion

Between six and nine measurements were taken in the field for specific conductance at 13 stations from Lee to Durham (Table 5-4). Of the 114 measurements taken, all met quality assurance/quality control (QA/QC) requirements and are usable for New Hampshire's 2006 surface water quality report to the Environmental Protection Agency. New Hampshire surface water quality standards do not contain numeric limits for specific conductance.

Table 5-4 Specific Conductance Data Summary for the Oyster River 2004, VRAP


Station ID	Class	Samples Collected	Data Range ($\mu\text{S}/\text{cm}$)	Acceptable Samples Not Meeting NH Class A/B Standards	Number of Usable Samples for 2006 NH Surface Water Quality Assessment
14-OYS	A	9	54.2 - 93.7	Not Applicable	9
01-XBB	A	9	97.4 - 121.3	N/A	9
13-OYS	A	9	73.6 - 120.4	N/A	9
01-DBE	A	9	62.7 - 114.3	N/A	9
09-OYS	A	9	77.6 - 164.5	N/A	9
08-OYS	A	9	82.3 - 188.7	N/A	9
01-CSB	A	9	139.6 - 240.2	N/A	9
07-OYS	A	9	91.8 - 196.9	N/A	9
01-HML	B	9	138.4 - 352.1	N/A	9
05-OYS	B	6	103.9 - 345.1	N/A	6
00J-PRB	B	9	239.5 - 708.0	N/A	9
02-BRD	B	9	188.6 - 331.6	N/A	9
03-JNC	B	9	137.1 - 370.0	N/A	9
Total Number of Useable Samples for 2006 NH Surface Water Quality Assessment					114

Specific conductance levels were highly variable at the stations monitored with the average ranging from $74\mu\text{S}$ to $457\mu\text{S}$ (Figure 5-4). The influence of urbanization on specific conductance is apparent by the increased levels from the more rural upstream areas to the more urbanized areas in Durham. Anions (negatively charged elements such as chloride) and cations (positively charged elements such as calcium) are typically found in rivers flowing through urbanized areas.

5.4.2. Recommendations

- Continue sampling at all stations as this will help to build a long-term data set to better understand trends as time goes on.
- Consider collecting chloride samples at the same time specific conductance is measured. Specific conductance levels correlate very closely with chloride levels. The specific conductance levels measured this year and in past years indicate that the more downstream stations could have chloride levels which are above New Hampshire surface water quality standards. Although it is possible that the higher specific conductance levels are caused by a parameter other than chlorides, testing for chlorides would be an appropriate first step.

**Figure 5-4. Specific Conductance Statistics for the Oyster River
March 12 - November 12, 2004, NHDES VRAP**

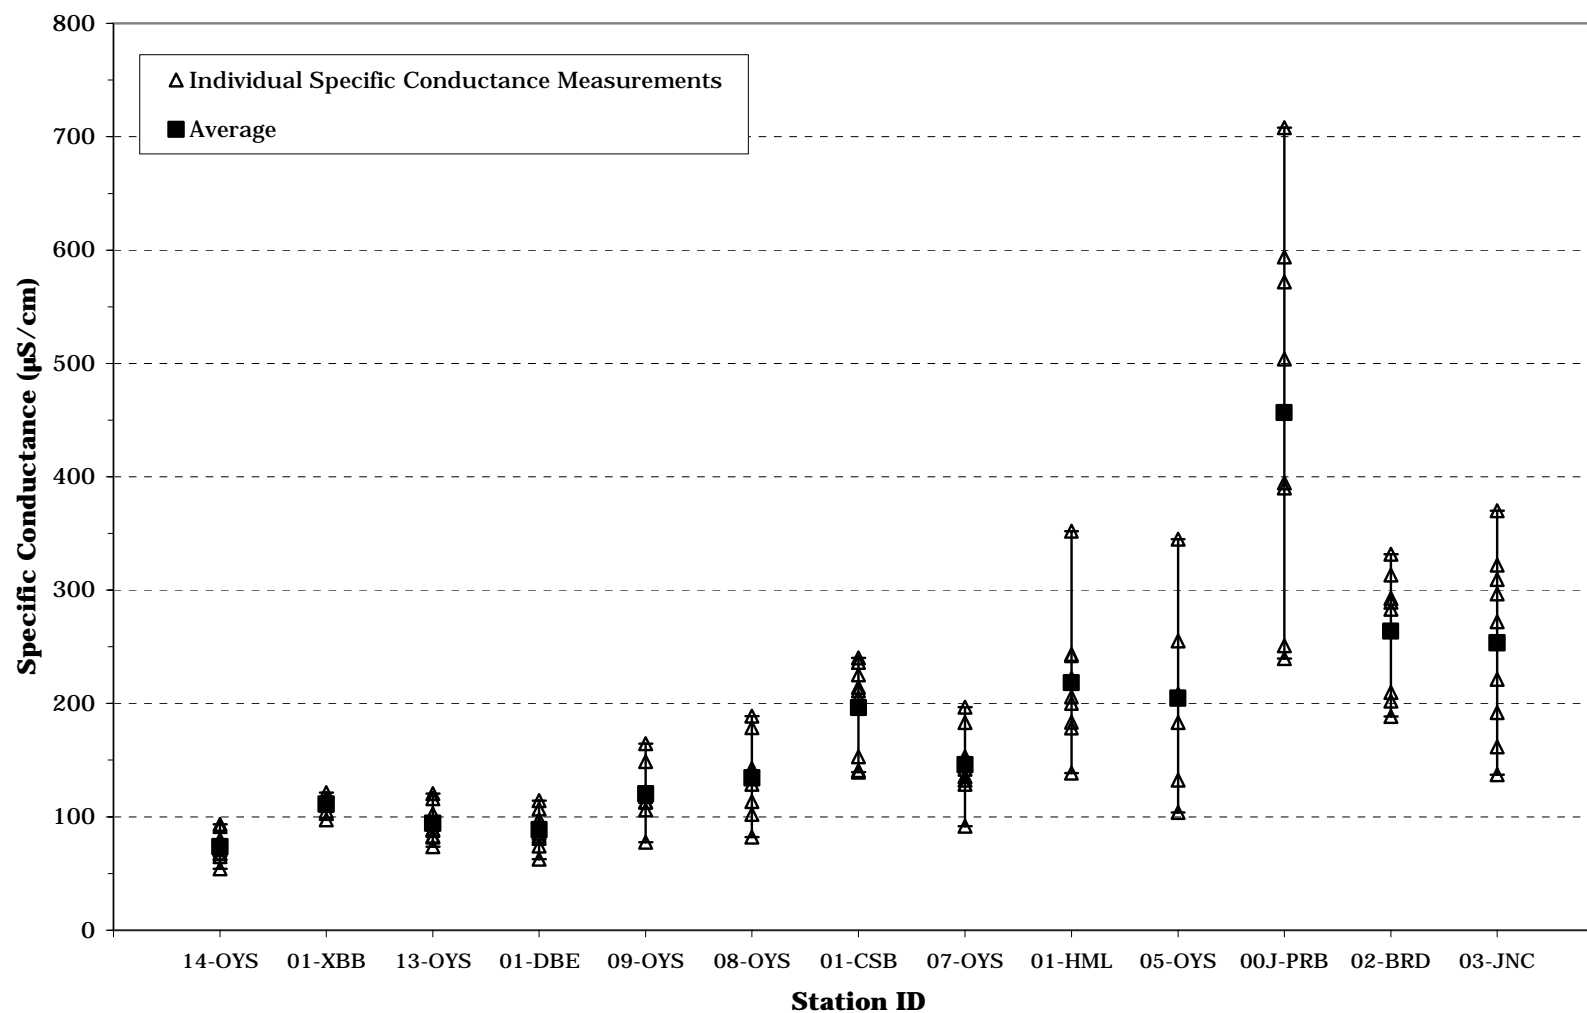

5.5. Bacteria/*Escherichia coli*

5.5.1. Results and Discussion

Five measurements were taken in the field for *Escherichia coli* (*E. coli*) at 13 stations from Lee to Durham (Table 5-5) (A total of nine measurements were taken at station 05-OYS by the Ambient River Monitoring Program. All measurements met quality assurance/quality control (QA/QC) requirements and are usable for New Hampshire's 2004 surface water quality report to the Environmental Protection Agency. Class A NH surface water quality standards for *E.coli* are as follows:

<153 cts/100 ml, based on any single sample, or
<47 cts/100 ml, based on a geometric mean calculated from three samples collected within a 60-day period.

Class B NH surface water quality standards for *E.coli* are as follows:

<406 cts/100 ml, based on any single sample, or
<126 cts/100 ml, based on a geometric mean calculated from three samples collected within a 60-day period.

Table 5-5 *E. coli* Data Summary for the Oyster River 2004, VRAP

Station ID	Class	Samples Collected	Data Range (cts/100ml)	Acceptable Samples Not Meeting NH Class A/B Standards	Number of Usable Samples for 2006 NH Surface Water Quality Assessment
14-OYS	A	5	5 - 200	1	5
01-XBB	A	5	5 - 70	0	5
13-OYS	A	5	10 - 160	1	5
01-DBE	A	5	20 - 910	3	5
09-OYS	A	5	90 - 1480	2	5
08-OYS	A	5	60 - 460	2	5
01-CSB	A	5	10 - 160	1	5
07-OYS	A	5	10 - 480	2	5
01-HML	B	5	50 - 660	3	5
05-OYS	B	9	5 - 270	0	9
00J-PRB	B	5	130 - 730	3	5
02-BRD	B	5	80 - 810	2	5
03-JNC	B	5	110 - 600	2	5
Total Number of Useable Samples for 2006 NH Surface Water Quality Assessment					69

Eleven of the thirteen stations tested for *E.coli* had single sample levels which exceeded the New Hampshire surface water quality standard (Figure 5-5).). In order for a geometric mean to be computed three samples must be collected within a 60-day period. At all stations five measurements were taken over the course of the monitoring

season. This allows DES to calculate a rolling geometric mean [Table 5-6]. As the table indicates all stations violated the standard of <126 cts/100 ml, based on a geometric mean calculated from three samples collected within a 60-day period.

Several factors can contribute to elevated *E. coli* levels, including, but not limited to rain storms, low river flows, the presence of wildlife (e.g., birds), and the presence of septic systems along the river.

Table 5-6 Rolling geometric means for *E. coli* data, Oyster River 2004, VRAP


Station ID	Class	Geometric Mean 6/22/04 - 8/17/04	Geometric Mean 7/22/04 - 9/16/04	Geometric Mean 8/17/04 - 10/8/04	Geometric Means Not Meeting NH Class A/B Standards	Number of Usable Geometric Means for 2006 NH Surface Water Quality Assessment
14-OYS	A	92	80	34	2	3
01-XBB	A	23	35	65	1	3
13-OYS	A	101	109	54	3	3
01-DBE	A	475	237	108	3	3
09-OYS	A	299	299	237	3	3
08-OYS	A	180	202	140	3	3
01-CSB	A	66	58	32	2	3
07-OYS	A	190	166	58	3	3
01-HML	B	563	484	222	3	3
00J-PRB	B	367	385	367	3	3
02-BRD	B	321	387	225	3	3
03-JNC	B	463	339	266	3	3
Station ID	Class	Geometric Mean 3/24/04 - 5/19/04	Geometric Mean 4/22/04 - 6/16/04	Geometric Mean 6/16/04 - 8/10/04	Geometric Means Not Meeting NH Class B Standards	Number of Usable Geometric Means for 2006 NH Surface Water Quality Assessment
05-OYS	B	41	88	36	0	3
Total Number of Useable Geometric Means for 2006 NH Surface Water Quality Assessment						39

5.5.2. Recommendations

- Continue to collect three samples at each station within any 60-day period during the summer to allow for determination of geometric means.
- Continue to document river conditions and station characteristics (including the presence of wildlife in the area during sampling).
- At stations with particularly high bacteria levels volunteers can investigate further by moving upstream and taking additional measurements. This will facilitate isolating the location of the cause of the elevated bacteria levels.

Those sampling should also look for any potential sources of bacteria such as emission pipes and failed septic systems.

**Figure 5-5. *Escherichia coli* Statistics for the Oyster River
May 24 - October 21, 2004, NHDES VRAP**

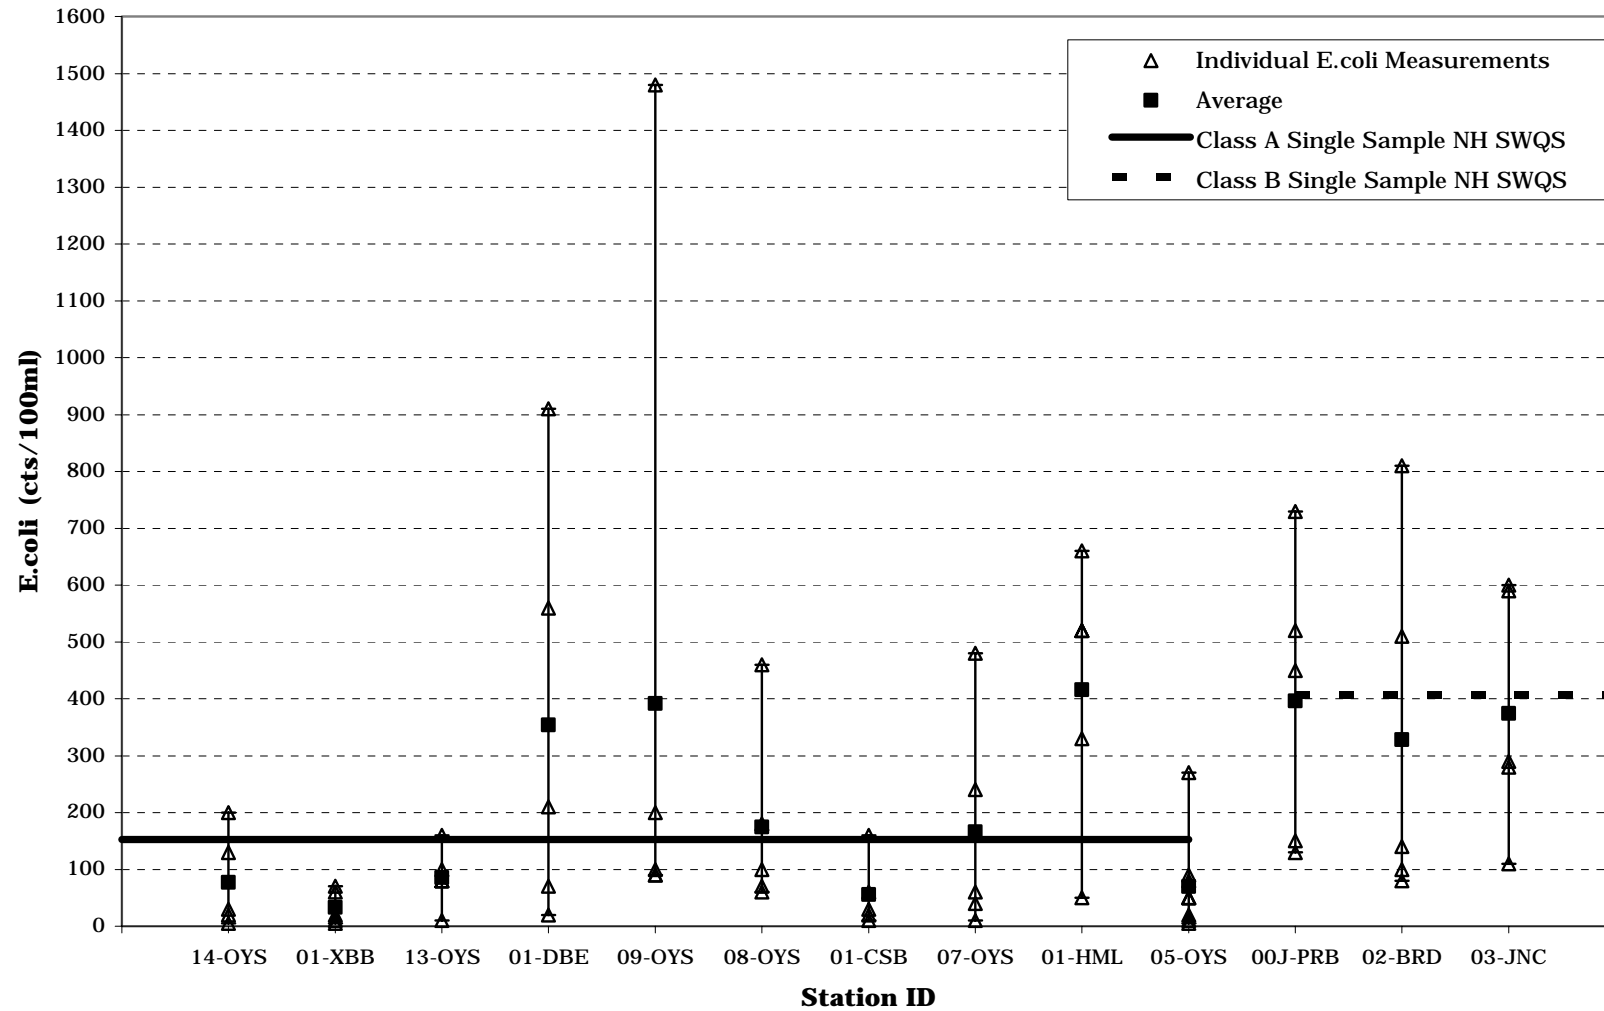

5.6. Methyl Tertiary Butyl Ether (MtBE)

5.6.1. Results and Discussion

One measurement was taken in the field for MtBE at 3 stations from Lee to Durham (Table 5-7). All measurements met quality assurance/quality control (QA/QC) requirements and are usable for New Hampshire's 2004 surface water quality report to the Environmental Protection Agency.

The New Hampshire Department of Health and Human Services, Bureau of Health Risk Assessment (BHRA) has developed a health-based drinking water standard for MtBE of 13 micrograms per liter ($\mu\text{g/L}$) for community public water systems. NHDES has adopted that value as a maximum contaminant level (MCL) in New Hampshire's Safe Drinking Water Act Program. In addition, RSA 485:16-a states that any public water system delivering water with greater than 5 parts per billion of MtBE shall notify each customer of the MtBE content.

MtBE is a fuel additive used to meet federal reformulated gasoline (RFG) requirements and helps make engines burn cleaner thus reducing smog-causing air pollutants. However, MtBE has a high solubility in water and in the event of a spill tends to spread quickly through the ground thus increasing the possibility of contaminating surface waters and drinking water wells.

Table 5-7 MtBE Data Summary for the Oyster River 2004, VRAP

Station ID	Class	Samples Collected	Data Range ($\mu\text{g/L}$)	Acceptable Samples Not Meeting NH Class A/B Standards	Number of Usable Samples for 2004 NH Surface Water Quality Assessment
13-OYS	A	1	undetected	Not Applicable	1
09-OYS	A	1	undetected	N/A	1
07-OYS	A	1	undetected	N/A	1
Total Number of Useable Samples for 2004 NH Surface Water Quality Assessment					3

MTBE levels were undetectable at the three stations monitored.

5.6.2. Recommendations

- Continue sampling at stations where MTBE contamination is a risk.

APPENDIX
2004 OYSTER RIVER WATER QUALITY DATA